


## Adjustable Bridge Support Brackets Technical Specification

**For use with under insulation block mid beam installation  
 available to suite 155, 175 and 225 deep precast beams**

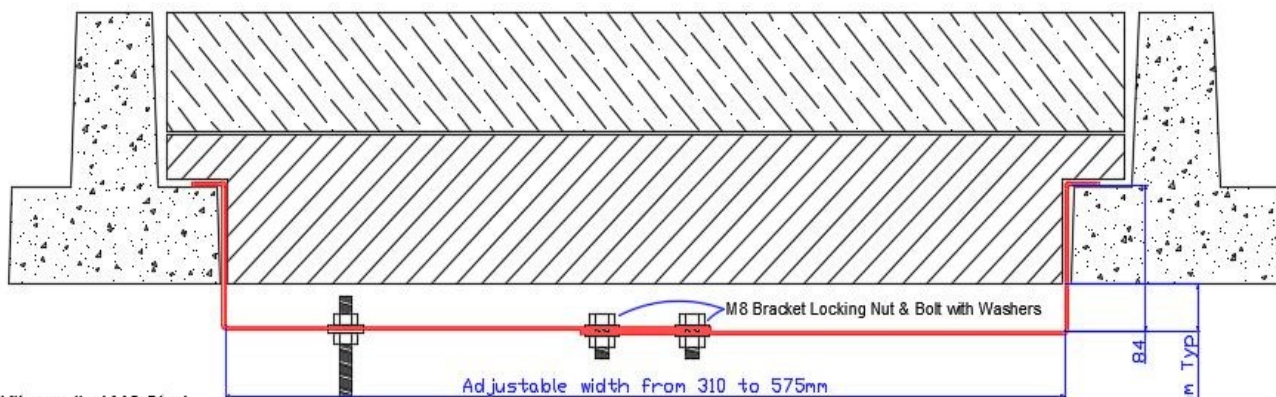

Kit supplied M8 Stud provides a drop range from circa 25mm to 450mm pending orientation of the pipe bracket

NB - M8 Stud length can be extended by replacement up to 1m or reducing by cutting with a suitable tool

The adjustable bracket has a slot allowing the position of the pipe bracket to be optimized for best fit

Each kit includes:


- 1 x 2mm L/H Slotted Bracket
- 1 x 2mm R/H Slotted Bracket
- 2 x 30mm M8 BZP Bolt
- 1 x 333mm M8 BZP Stud Length
- 6 x M8 Washers
- 7 x M8 BZP Nuts

NB Components are supplied None Assembled

All components are manufactured from  
 Pre-galvanised Mild Steel BS EN 10346:2009 DX51D  
 or Mild Steel / Zinc Plated BS EN ISO898 / ISO4042

Should your application require higher corrosive protection  
 this product can be supplied in Stainless Steel

Pipe brackets should be spaced 900-1000mm apart allowing for a constant gradient as recommended by NHBC Technical Services

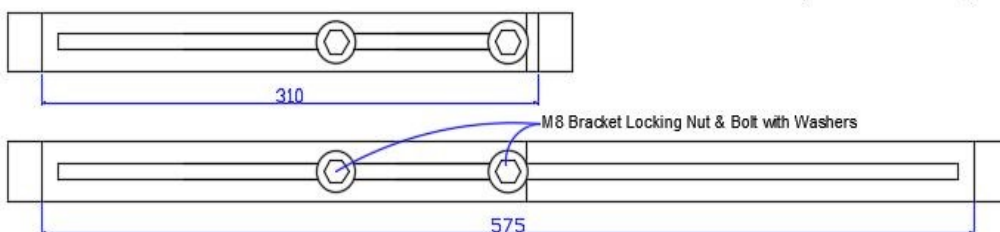

**Gordon Products Ltd - Developing & Manufacturing Metal Components since 1965**

Wire Forms

Forming & Pressing

Welding

Laser Cutting

Paint & Coatings



For more information check out our website at [www.gordonproducts.co.uk](http://www.gordonproducts.co.uk)

Gordon Products Ltd

Tel: 01928 732 158 / Email: [info@gordonproducts.co.uk](mailto:info@gordonproducts.co.uk)